


## Hanging Carved Panels Installation Instructions





Hanging Carved Panels are acoustic screens that attach to the ceiling and provide privacy, divide up a space and absorb sound.

Designed using sound absorbing PET acoustic material, these panels reduce noise and visual distractions.

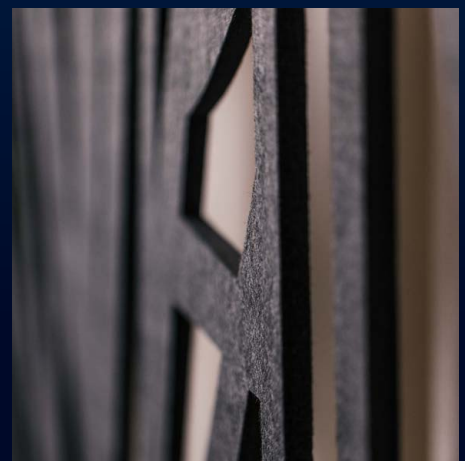



1. Your Hanging Carved Panel includes an HPHANG Hanging Kit. Attach parts as shown below.

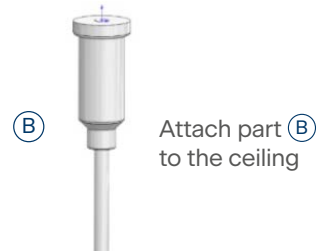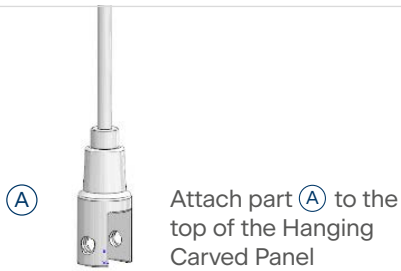

2. Attach fixing (A) to the top of the panel as shown. Measure in 200mm from the side of the panel and drill a small hole to allow the grub screw to screw through the panel. Repeat for the other side of panel. (This measurement can be adjusted dependent on where you are fixing into the ceiling just aim to have the fixings equidistant from the corners).



Drill (B) into the ceiling (using wall plugs if needed) lining up with the fixings (A) you have installed on the panel. This will ensure the wires hang straight.

3. Using two people lift the panel and feed the wire through (B) and out through the gap in the side of the ceiling mount.

4. Pull the wire through to the approximate length you need and adjust the length of the wires to ensure the panel sits level. Cut the wire to length.

*Repeat at the bottom of the panel into the floor if required.*

**Option to fix Hanging Carved Panels to ceiling tiles:**

If you have ordered CEILINGGFIX Ceiling Grid Fixing Kit simply twist the white fixings on to the ceiling grid and screw the mount on. Now feed the wire through the ceiling mount, to the approximate length you need and adjust the length of the wires to ensure the panel sits level. Cut the wire to length.

